



Addressable Smoke Detector

Model No.: AW-D101

Work Voltage: 18-28VDC @Loop

Standby Current: $\leq 2.5\text{mA}$ @Loop 24VDC


Alarm Current: $\leq 3\text{mA}$ @Loop 24VDC

Smoke Sensitivity: 0.18~0.3dB/m

Work Temperature: $-10^{\circ}\text{C} \sim 50^{\circ}\text{C}$

Size: $\phi 99.8\text{mm}$

No.6:Remote Indicator+	No.3:Remote Indicator-
No.2:Loop IN +	No.5:Loop IN -

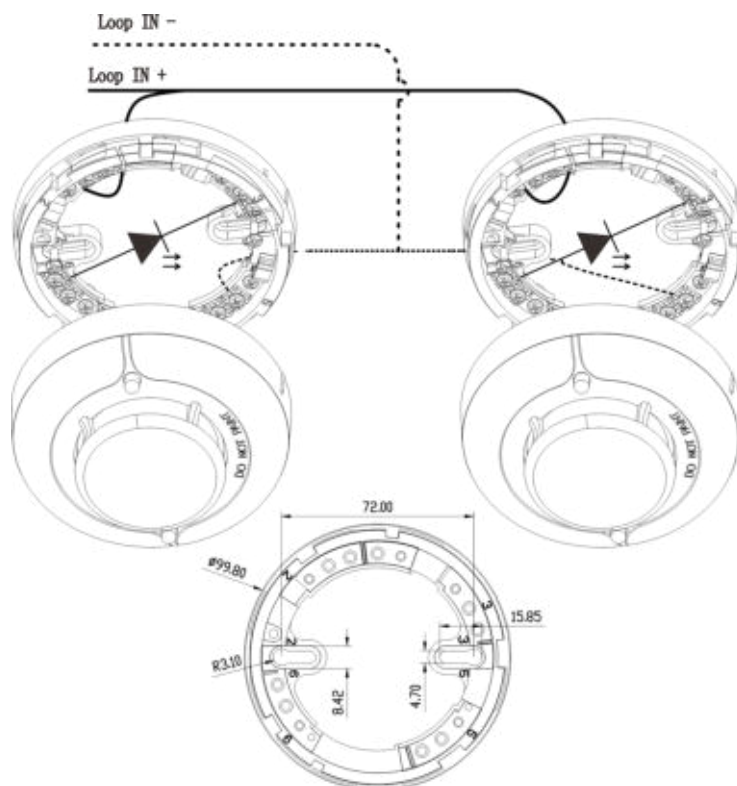

ASENWARE LTD

ADDRESS: 6 PROSPECT WAY, ROYAL OAK INDUSTRIAL ESTATE DAVENTRY, NORTHAMPTONSHIRE, ENGLAND, NN118PL

WEBSITE: www.asenware.com EMAIL: info@asenware.com