

Asenware AW-D120C is an conventional sounder base for conventional detector, which can be configured with Asenware AW-CFP2166 Series Conventional Fire Alarm Control Panel.


Each sounder give a visual and audible signals when the detector enters fire alarm condition. Its alarm signal can be transmitted to fire control panel.



Features

- ✓ Four-wire connection
- ✓ LED indication
- ✓ Activated only by detector on the sounder base
- ✓ Meet all requirement of EN 54-3:2018

Installation

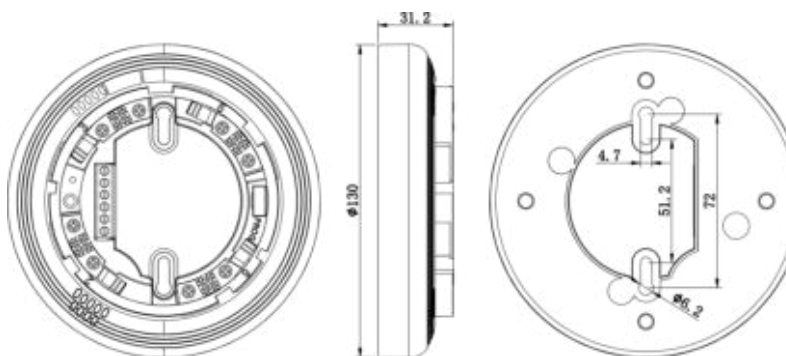

Technical Specification

Model	AW-D120C
Operating voltage	20~28VDC @ 24Vdc
Operating current(@ 24VDC)	Standby status≤10mA Alarm status≤65mA
Wiring	4 wire (24V and Zone)
Alarm SPL	≥65dB @3m
Environmental	Temperature range: -10~55°C (14~131°F) Humidity: 5 to 95% RH, non-condensing
Mating host	AW-CFP2166 Series Conventional Fire Alarm Control Panel
Size	Φ 130mm*31.2mm
Weight	About 145g